

EXCLUSIVE
 I.T. 10 YEAR
10
 WARRANTY
 FREE
 REPLACEMENT

**COMPONENT
 LEVEL FUSING**

HS-60A Models

GENERAL SPECIFICATIONS



Description: 120 V & 250 V, Series or parallel wired, terminal strip connected, Multi-stage hybrid Active Tracking Network (ATN®) enhanced sine wave tracking surge protective device.

Application: Dedicated AC, ≤60 amps, feeding variable speed drives, variable frequency drives, process controllers, PLCs, power supplies, micro-processor based loads, CNCs and a wide variety of other mission critical and general purpose individual loads.

Warranty: Ten Year Free Replacement

Unit Listings: Recognized components under UL1449 Second Edition, UL1283

Manufacturer Qualifications: ISO 9001:1994 Quality System Certification BSI FM 30833

MECHANICAL SPECIFICATIONS

Enclosure: ABS Plastic UL94-5VA

Connection: Stud-lugs

Weight: ≈ 1 lb (.45 kg)

Operating Temperature: -40° F (-40° C) to +140° F (+60° C)

ELECTRICAL/PERFORMANCE SPECIFICATIONS

Circuit Description: Multi-stage hybrid network utilizing circuit encapsulation and Advanced Surge Path Technology

Protection Modes: All Mode: Dedicated L-N (normal mode), Dedicated L-G, N-G (common mode)

Input Power Frequency: 0-64 Hz (AC)

Response Time: Active <1 nanosecond


Maximum EMI/RFI Attenuation – Mil-Std-220

1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	Maximum Attenuation Frequency
3 dB	20 dB	37 dB	31 dB	17 dB	38 dB @ 176 kHz

Maximum Continuous Operating Current: 60 Amps rms up to 250 volts

Short Circuit Current Rating: 200 kA when protected by class R, 60 Amp fuses

HS-60A Models

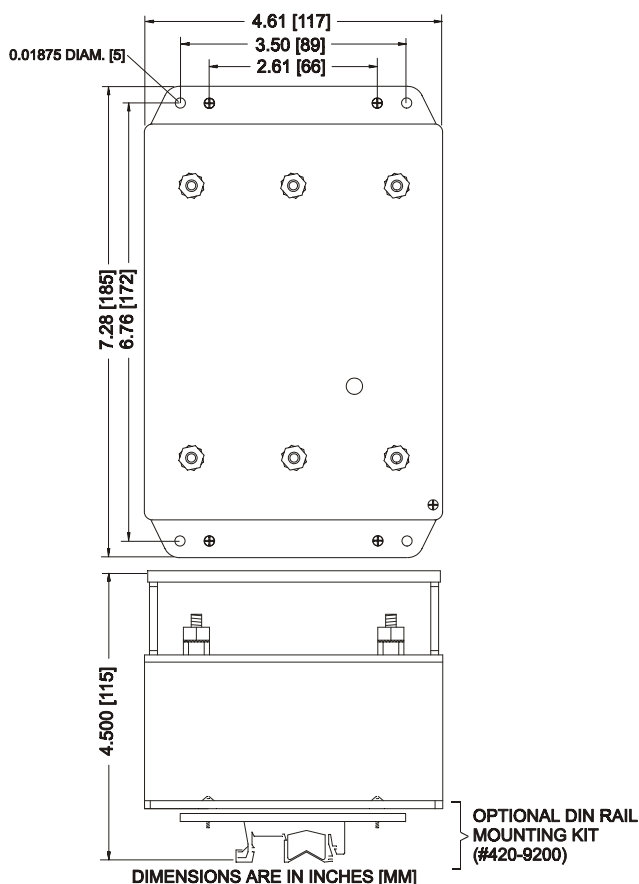

Available Models	Peak Surge Current Phase/Mode	Nominal System Voltage (AC-Vrms, DC-Vpk)	ANSI/IEEE C62.41-1991 Measured Limiting Voltage*			UL SVR
			A1 Ring Wave 2 kV, 67 A 180° Phs Angle	A3 Ring Wave 6 kV, 200 A 90° Phs Angle	B3/C1 Impulse Wave 6 kV, 3 kA 90° Phs Angle	UL 1449-2 Suppressed Voltage Ratings
			L-N L-G, N-G	L-N L-G, N-G	L-N L-G, N-G	L-N L-G, N-G
IT US HS-120-60A	80 kA/40 kA	48-150 VAC 48-200 VDC	30 70, 40	240 350, 130	420 450, 430	400 400, 400
IT US HS-250-60A	80 kA/40 kA	120-275 VAC 120-300 VDC	20 50, 40	430 540, 140	770 820, 780	800 800, 800

*Test Environment: Positive polarity. Tested with AC power applied. All units tested at terminals, time base = 1 ms. All measurements referenced from zero volts per NEMA LS-1.